

# **RS201 THRU RS207**

## Single Phase 2.0 AMPS. Glass Passivated Bridge Rectifiers

Voltage Range 50 to 1000 Volts

Current 2.0 Amperes

### FEATURES

- ◆Ideal for printed circuit board
- ◆ Reliable low cost construction technique results in inexpensive product
- ◆ High temperature soldering guaranteed: 260°C / 10 seconds / 0.375" (9.5mm) lead length at 5 lbs., (2.3 kg) tension


#### Mechanical Data

◆Case: Molded plastic

◆Lead: solder plated

◆Polarity: As marked

### RS<sub>2</sub>

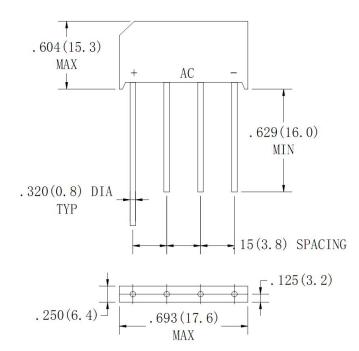

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

Single phase, nan wave, outiz, resistive of inductive load. For capacitive load, defate current by 20%								
	RS201	RS202	RS203	RS204	RS205	RS206	RS207	UNITS
$V_{RRM}$	50	100	200	400	600	800	1000	V
V <sub>RMS</sub>	35	70	140	280	420	560	700	V
V <sub>DC</sub>	50	100	200	400	600	800	1000	V
I(AV) 2.0								Α
I <sub>FSM</sub> 50							Α	
V <sub>F</sub>	1.1						V	
,	10							μА
I <sub>R</sub>	500							
$R\theta_{JA}$	28							°C/W
TJ	-55 to +125							$^{\circ}$
T <sub>STG</sub>	-55 to +150							$^{\circ}\!\mathbb{C}$
	$\begin{array}{c} V_{RMS} \\ V_{DC} \\ \\ I(AV) \\ \\ I_{FSM} \\ \\ V_{F} \\ \\ I_{R} \\ \\ R\theta_{JA} \\ \\ T_{J} \\ \end{array}$	V <sub>RRM</sub> 50 V <sub>RMS</sub> 35 V <sub>DC</sub> 50  I(AV)  I <sub>FSM</sub> V <sub>F</sub> I <sub>R</sub> Rθ <sub>JA</sub> T <sub>J</sub>	V <sub>RRM</sub> 50 100 V <sub>RMS</sub> 35 70 V <sub>DC</sub> 50 100  I(AV)  I <sub>FSM</sub> V <sub>F</sub> I <sub>R</sub> Rθ <sub>JA</sub> T <sub>J</sub>	V <sub>RRM</sub> 50 100 200 V <sub>RMS</sub> 35 70 140 V <sub>DC</sub> 50 100 200  I(AV)  I <sub>FSM</sub> V <sub>F</sub> I <sub>R</sub> Rθ <sub>JA</sub> T <sub>J</sub> -6	V <sub>RRM</sub> 50 100 200 400 V <sub>RMS</sub> 35 70 140 280 V <sub>DC</sub> 50 100 200 400  I(AV) 2.0  V <sub>F</sub> 1.1  I <sub>R</sub> 10  500  Rθ <sub>JA</sub> 28  T <sub>J</sub> -55 to +12	V <sub>RRM</sub> 50       100       200       400       600         V <sub>RMS</sub> 35       70       140       280       420         V <sub>DC</sub> 50       100       200       400       600         I(AV)       2.0         I <sub>FSM</sub> 50         V <sub>F</sub> 1.1         I <sub>R</sub> 10         500         Rθ <sub>JA</sub> 28         T <sub>J</sub> -55 to +125	V <sub>RRM</sub> 50       100       200       400       600       800         V <sub>RMS</sub> 35       70       140       280       420       560         V <sub>DC</sub> 50       100       200       400       600       800         I(AV)       2.0         V <sub>F</sub> 1.1         I <sub>R</sub> 10       500         Rθ <sub>JA</sub> 28         T <sub>J</sub> -55 to +125	V <sub>RRM</sub> 50 100 200 400 600 800 1000 V <sub>RMS</sub> 35 70 140 280 420 560 700 V <sub>DC</sub> 50 100 200 400 600 800 1000  I(AV) 2.0  V <sub>F</sub> 1.1  I <sub>R</sub> 10  500  Rθ <sub>JA</sub> 28  T <sub>J</sub> -55 to +125

Note: Unit Mounted on P.C.B. with 0.47×0.47"(12×12mm) Copper Pads, 0.375"(9.5mm) Lesd Length



## **RS201 THRU RS207**

Single Phase 2.0 AMPS. Glass Passivated Bridge Rectifiers
Voltage Range 50 to 1000 Volts

Current 2.0 Amperes

#### RATING AND CHARACTERISTIC CURVES RS201 THRU RS207

FIG.1-MAXIMUM NONO-REPETITIVE FORWARD

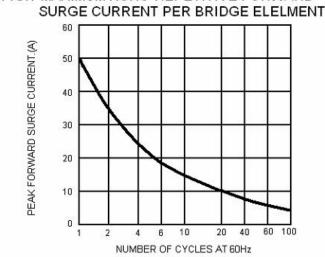


FIG.2-MAXIMUM FORWARD CURRENT DERATING

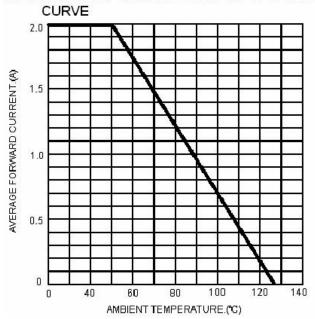


FIG.3-TYPICAL INSTANTANEOUS FORWARD
CHARACTERISTICS PER BRIDGE ELEMENT


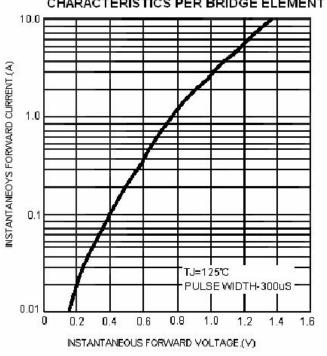


FIG.4-TYPICAL REVERSE CHARACTERISTICS

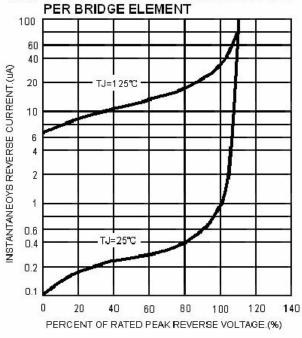

Note: Specification are subject to change without notice. For more detail and update, please visit our website.