

AXIAL LEAD, METALLIZE POLYPROPYLENE FILM – OVAL


TS04D

FEATURES

- TS04D is constructed with metallized polypropylene film as medium and electrode, wrapped and sealed with flame-resistance plastic and epoxy resin, with high reliability, high-temperature-resistance, small volume, large capacity and good self-healing property.
- Mainly used in instruments and the DC & AC circuit of the household equipment and the fractional frequency circuit of acoustics system.

SPECIFICATIONS

OPERATING TEMPERATURE	-55°C TO + 100°C		
CAPACITANCE RANGE	0.022 μF ~ 47 μF		
CAPACITANCE TOLERANCE	J (±5%), K (±10%)		
RATED VOLTAGE	250V, 400V, 630V, 1000V, 1250V (DC)		
WITHSTAND VOLTAGE	1.7U _R 2s (1.5U _R 5s)		
DISSIPATION FACTOR	C ≤ 0.1 μF	≤ 0.0015	10KHz
	0.1 μF < C ≤ 1 μF	≤ 0.0020	10KHz
	1 μF < C ≤ 4.7 μF	≤ 0.0030	10KHz
	C > 4.7 μF	≤ 0.0015	1KHz
INSULATION RESISTANCE	C ≤ 0.33 μF	≥ 50000 MΩ	
	C > 0.33 μF	≥ 15000 S	

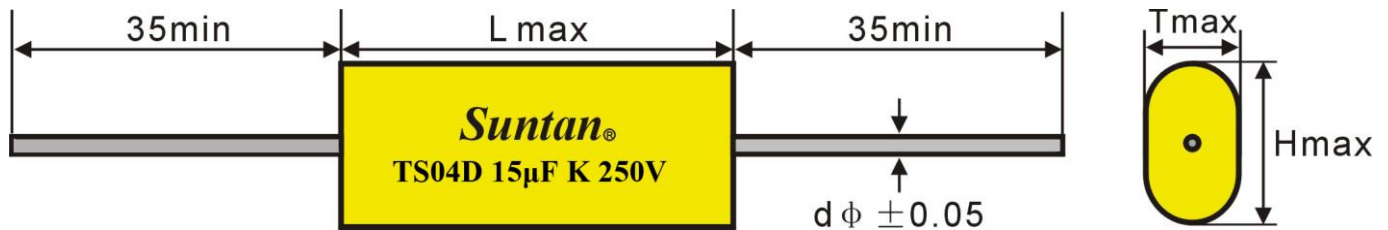

CAP	250VDC				400VDC				630VDC				1000VDC				1250VDC				
	L	T	H	d	L	T	H	d	L	T	H	d	L	T	H	d	L	T	H	d	
223	0.022	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	16.0	7.5	10.5	0.6	
333	0.033	--	--	--	--	--	--	--	--	--	--	--	16.0	7.0	10	0.6	21.0	6.5	9.5	0.6	
473	0.047	--	--	--	--	--	--	--	--	--	--	--	16.0	8.5	12	0.8	21.0	7.5	12	0.6	
683	0.068	--	--	--	--	--	--	--	--	--	--	--	21.0	7.0	11.5	0.6	26	7.0	13	0.6	
104	0.1	16.0	6.0	9.0	0.6	21.0	7.0	10.5	0.6	26.0	6.5	13	0.6	26	7.0	11.5	0.6	26	8.5	14.5	0.8
224	0.22	21.0	5.0	9.0	0.6	16.0	6.5	10.5	0.6	16.0	12.0	16	0.8	26	10.0	16	0.8	32	10.5	18	0.8
334	0.33	16.0	7.0	10.5	0.6	16.0	9.0	13.0	0.6	21.0	10.5	15	0.8	32	10.0	17.5	0.8	37.5	11.5	20	0.8
474	0.47	16.0	8.5	12.5	0.8	21.0	9.0	14.0	0.6	21.0	13.0	17	0.8	37.5	10.5	19.5	0.8	47.5	10.5	21	0.8
684	0.68	21.0	6.8	12.0	0.6	21.0	10.0	14.0	0.8	26	12.0	18	0.8	47.5	10.0	20.5	0.8	57.5	11.5	23.5	0.8
105	1.0	21.0	8.5	13.5	0.8	26	9.0	13.0	0.8	26	15.0	20.5	1.0	57.5	10.5	23	0.8	67.5	12.5	25	1.0
225	2.2	31	11.0	17.5	0.8	32	11.5	17.0	0.8	32	18.5	26.5	1.0	67.5	15.5	27.5	1.0	67.5	20.0	32.5	1.0
335	3.3	32	11.5	17.5	0.8	32	13.5	19.5	0.8	32	23.0	32.5	1.0	67.5	19.5	31.5	1.0	67.5	20.0	32.5	1.0
475	4.7	31	16.5	22.5	1.0	37.5	15.0	22.0	1.0	37.5	24.0	35	1.0	67.5	24.0	36.5	1.0	--	--	--	--
565	5.6	37.5	13.0	20.5	1.0	47.5	14.5	21.0	0.8	47.5	21.0	34	1.0	--	--	--	--	--	--	--	--
685	6.8	47.5	11.0	20.5	0.8	47.5	15.0	23.0	1.0	57.5	20.5	33.5	1.0	--	--	--	--	--	--	--	--
825	8.2	47.5	12.5	22.0	1.0	57.5	14.0	22.0	1.0	57.5	23.0	35.5	1.0	--	--	--	--	--	--	--	--
106	10.0	47.5	15.0	23.5	1.0	57.5	14.5	24.5	1.0	67.5	23.0	35.5	1.0	--	--	--	--	--	--	--	--
156	15.0	57.5	14.5	26.0	1.0	67.5	16.0	27.0	1.0	--	--	--	--	--	--	--	--	--	--	--	--
226	22.0	57.5	18.5	29.5	1.0	67.5	19.0	32.5	1.0	--	--	--	--	--	--	--	--	--	--	--	--
306	30.0	67.5	19.0	32.0	1.0	67.5	23.5	36.0	1.0	--	--	--	--	--	--	--	--	--	--	--	--
336	33.0	67.5	20.0	33.5	1.0	67.5	24.5	37.5	1.0	--	--	--	--	--	--	--	--	--	--	--	--
476	47.0	67.5	26.0	38.0	1.0	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Note: Specification are subject to change without notice. For more detail and update, please visit our website.