

ES3A THRU ES3J

SURFACE MOUNT SUPER FAST RECTIFIER
VOLTAGE RANGE 50 to 600 Volts CURRENT 3.0 Ampere



FEATURES

- ◆ Plastic package has underwrites laboratory
- ◆ Flammability Classification 94V-0
- ◆ Glass passivated chip junction
- ◆ Built-in strain relief
- ◆ Super Fast switching speed for high efficiency
- ◆ High temperature soldering guaranteed: 260°C/10 seconds

Mechanical Data

- ◆ Case: JEDED DO-214AB transfer molded plastic
- ◆ Terminals: Solder plated, solderable per MIL-STD-750
- ◆ Method 2026
- ◆ Polarity: Color band denotes cathode end
- ◆ Weight: 0.007 ounce, 0.25 gram

DO-214AB (SMC)

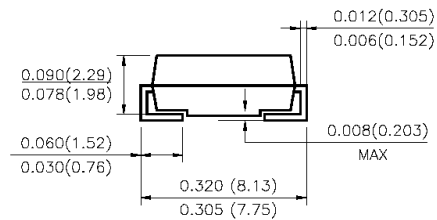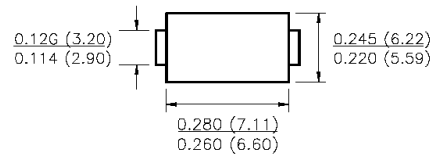

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

PARAMETER	SYMBOLS	ES3A	ES3B	ES3C	ES3D	ES3E	ES3G	ES3J	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	600	Volts
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	420	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	600	Volts
Maximum Average Forward Rectified Current at $T_L = 100^\circ\text{C}$	$I_{(AV)}$	3.0							Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	100							Amps
Maximum Instantaneous Forward Voltage @ 3.0A	V_F	0.95			1.25	1.7			Volts
Maximum DC Reverse Current at rated DC Blocking Voltage per element	$T_A = 25^\circ\text{C}$	5.0							μA
	$T_A = 125^\circ\text{C}$	300							
Typical Reverse Recovery Time Test conditions $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{RR} = 0.25\text{A}$	t_{rr}	35							nS
Typical Junction Capacitance (Measured at 1.0MHz and applied reverse voltage of 4.0V)	C_J	45				30			pF
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	55							$^\circ\text{C/W}$
	$R_{\theta JL}$	17							
Operating Junction Temperature Range	T_J	-55 to +150							$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150							$^\circ\text{C}$

Note: 1. Thermal resistance from Junction to ambient and from junction to lead mounted on P.C.B.

With 0.3"×0.3"(8.0mm × 8.0mm) copper pad areas.P.C.B.with 0.3×0.3"(8.0 × 8.0mm) copper pad areas.

ES3A THRU ES3J

SURFACE MOUNT SUPER FAST RECTIFIER
 VOLTAGE RANGE 50 to 600 Volts CURRENT 3.0 Ampere

RATING AND CHARACTERISTIC CURVES ES3A THRU ES3J

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

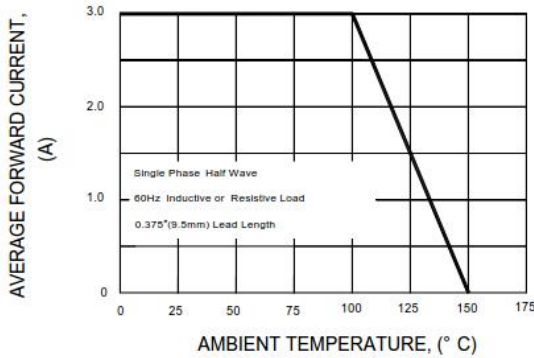


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

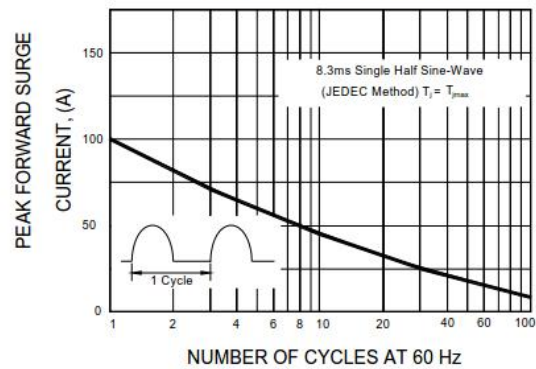


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

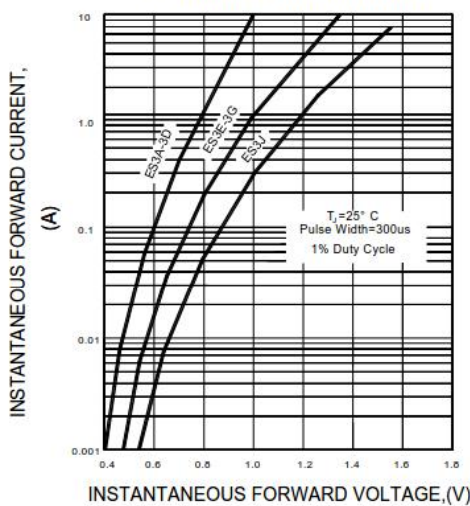


FIG.4-TYPICAL REVERSE CHARACTERISTICS

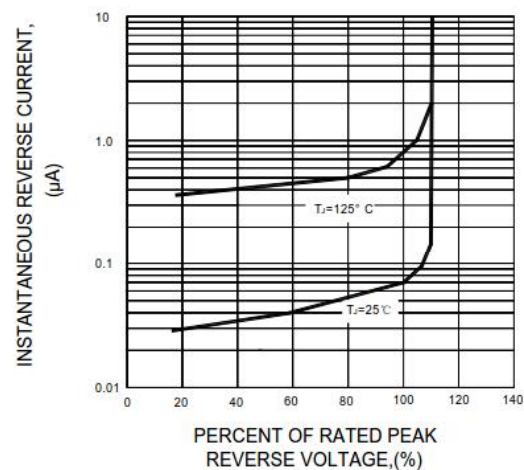


FIG.5-TYPICAL JUNCTION CAPACITANCE


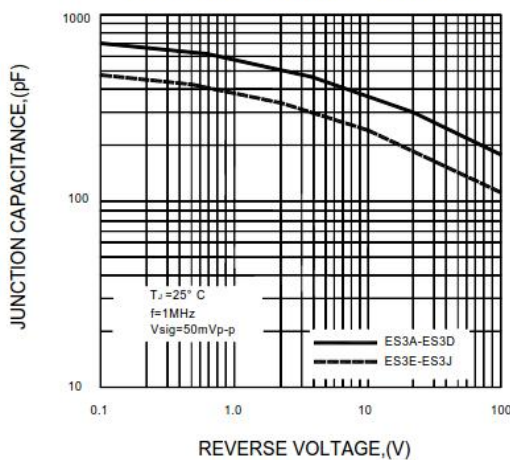


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

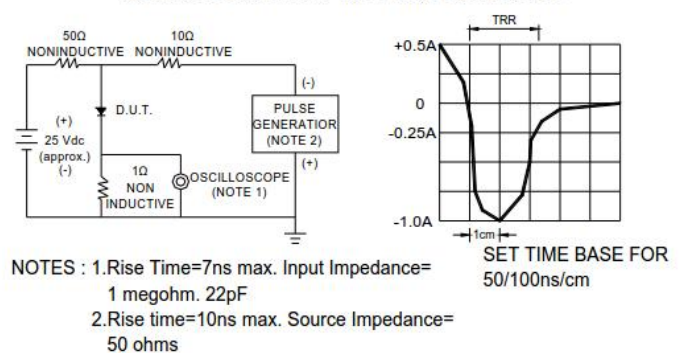

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.