

SF11 THRU SF18

SUPER FAST RECTIFIER

REVERSE VOLTAGE 50 to 600 Volts FORWARD CURRENT 1.0 Ampere


FEATURES

- ◆ Super fast speed switching speed
- ◆ Low forward voltage drop
- ◆ Low leakage current
- ◆ High forward surge capability
- ◆ High reliability
- ◆ High temperature soldering guaranteed:
260°C/10 seconds, 0.375" (9.5mm) lead length at
5 lbs(2.3kg) tension

Mechanical Data

- ◆ Case: Transfer molded plastic
- ◆ Epoxy: UL94V-0 rate flame retardant
- ◆ Polarity: Color band denotes cathode end
- ◆ Lead: Plated axial lead, solderable per
MIL-STD-202E method 208°C
- ◆ Mounting position: Any

DO-41

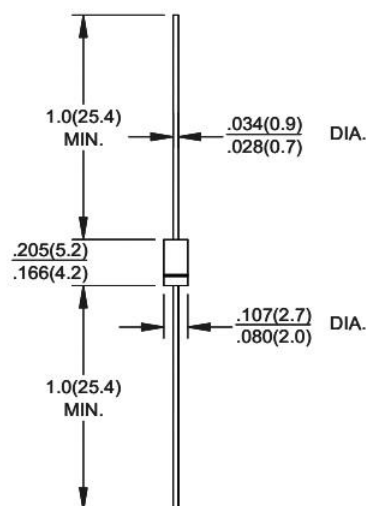

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

	SYMBOL	SF11	SF12	SF13	SF14	SF15	SF16	SF18	UNIT
Maximum Recurrent Peak Reverse	V_{RRM}	50	100	150	200	300	400	600	Volts
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	420	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	600	Volts
Maximum Average Forward Rectified Current at $T_A=55^\circ\text{C}$	$I_{(AV)}$	1.0							Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	30							Amps
Maximum Instantaneous Forward Voltage at 1.0A	V_F	0.95			1.25		1.7		Volts
Maximum DC Reverse Current $T_A=25^\circ\text{C}$ at rated DC Blocking voltage $T_A=100^\circ\text{C}$	I_R	5.0 100							μA
Maximum Reverse Recovery Time (NOTE 1)	T_{RR}	35							nS
Typical Junction Capacitance (NOTE 2)	C_J	15			10				pF
Typical Thermal Resistance (NOTE 3)	$R_{\theta JA}$	60							$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150							$^\circ\text{C}$

Note: 1. Reverse Recovery Test Conditions: $I_f=0.5\text{A}$, $I_r=1.0\text{A}$, $I_{rr}=0.25\text{A}$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts.

3. Thermal Resistance From Junction to Ambient at .375"(9.5mm) lead length, P.C. board mounted.

SF11 THRU SF18

SUPER FAST RECTIFIER

REVERSE VOLTAGE 50 to 600 Volts FORWARD CURRENT 1.0 Ampere

RATING AND CHARACTERISTIC CURVES SF11 THRU SF18

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

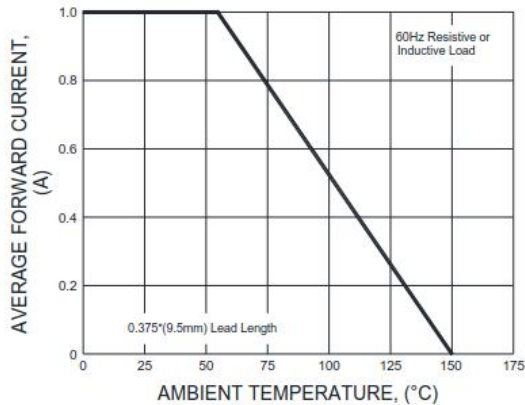


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

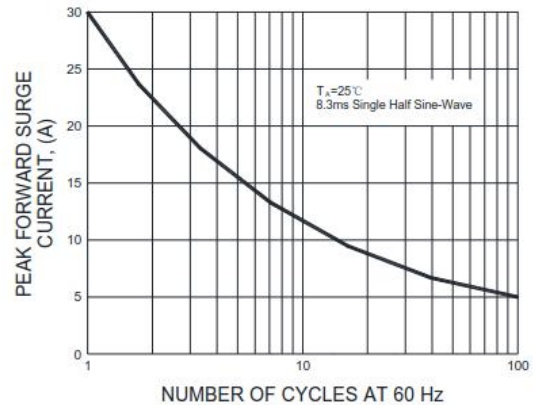


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

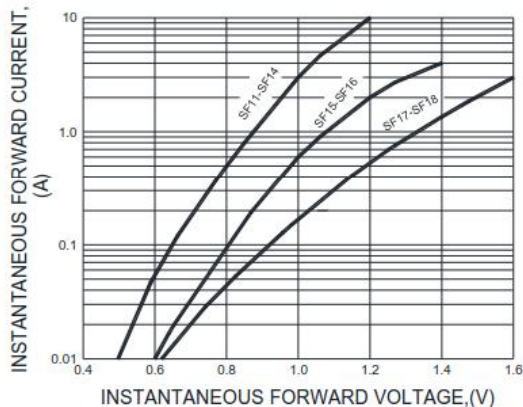


FIG.3-TYPICAL REVERSE CHARACTERISTICS

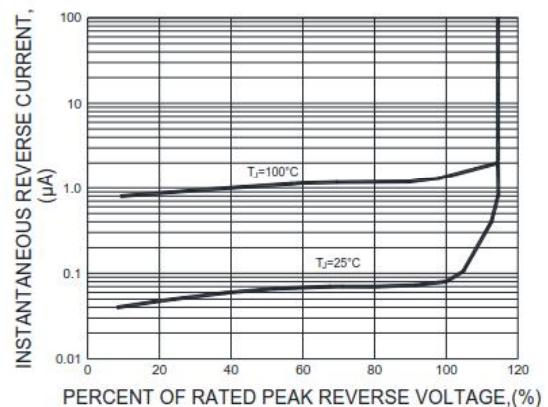


FIG.5-TYPICAL JUNCTION CAPACITANCE


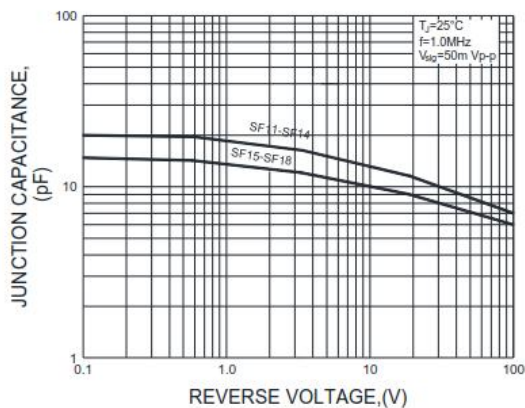


FIG.6-TEST CIRCUIT DIAGRAM AND FORWARD SURGE CURRENT

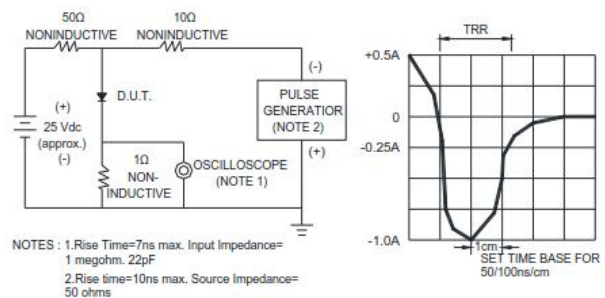

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.