

US1A THRU US1M

SURFACE MOUNT ULTRA FAST RECTIFIER

Reverse Voltage - 50 to 1000 Volts Forward Current - 1.0 Ampere

FEATURES

◆The plastic package carries Underwriters Laboratory

Flammability Classification 94V-0

- ◆For surface mounted applications
- Ultra fast switching for high efficiency
- ◆Low reverse leakage
- ◆Built-in strain relief, ideal for automated placement
- ◆High forward surge current capability
- ◆High temperature soldering guaranteed

250°C/10 seconds at terminals

Mechanical Data


◆Case: JEDEC SMA-J molded plastic body

◆Terminals: Plated axial leads, solderable per

MIL-STD-750, Method 2026

◆Polarity: Color band denotes cathode end

◆Mounting position: Any

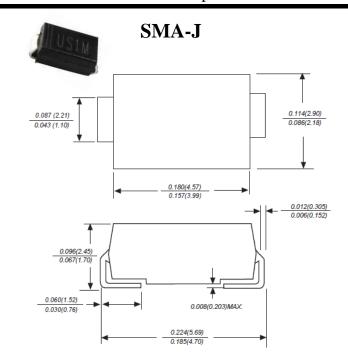

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

PARAMETER	SYMBOL	US1A	US1B	US1D	US1G	US1J	US1K	US1M	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	VOLTS
Maximum RMS Voltage	V_{RMS}	100	70	140	280	420	560	700	VOLTS
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current 0.375"(9.5mm) lead length(see fig.1)	I(AV)	1.0							Amp
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	Ifsm	30.0						Amps	
Maximum instantaneous forward voltage at 1.0A	V_{F}	1.0 1.3				1.7			VOLTS
Maximum DC Reverse Current $T_A = 25 ^{\circ}\text{C}$ at Rated DC blocking voltage $T_A = 100 ^{\circ}\text{C}$	I_R	5.0 50.0						uA	
Maximum reverse recovery time (NOTE 1)	t _{rr}	50			75			ns	
Typical Junction Capacitance (Note 2)	C _J	15.0						pF	
Typical Thermal Resistance (Note 3)	RθJA	50.0						°C/W	
Operating junction and Storage temperature range	T _J , Tstg	-65 to +125							$^{\circ}$


Note: 1. Reverse recovery condition I_F=0.5A,I_R=1.0A,Irr=0.25A


- 2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
- 3. P.C.B. mounted with 0.2x0.2"(5.0x5.0mm) copper pad areas


US1A THRU US1M


SURFACE MOUNT ULTRA FAST RECTIFIER Reverse Voltage - 50 to 1000 Volts Forward Current - 1.0 Ampere


RATING AND CHARACTERISTIC CURVES US1A THRU US1M

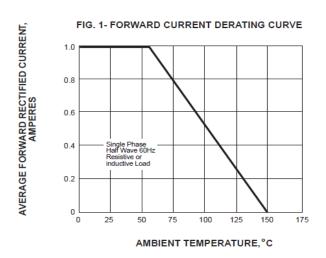

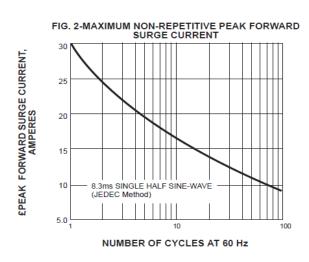


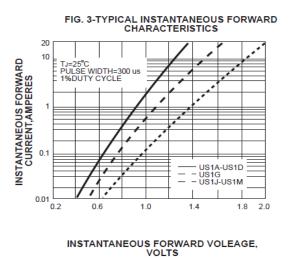

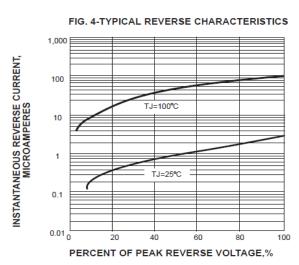

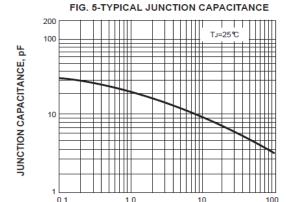

REVERSE VOLTAGE, VOLTS

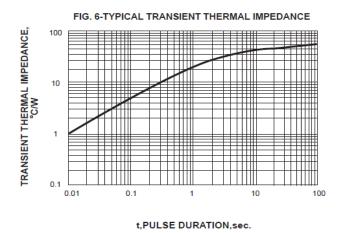

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.