Suntan_® Su_®

KBPC10005 THRU KBPC1010

SINGLE-PHASE BRIDGE RECTIFIER

REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 10.0 Ampere

FEATURES

- ♦Rating to 1000V PRV
- ◆Surge overload rating to 175 Amperes peak
- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction utilizing molded

plastic technique results in inexpensive product

- ◆Lead solderable per MIL-STD-202 method 208
- ♦ Mounting: thru hole for # 6 screw Mounting

BR-8

Polarity shown on side of case, Positive lead by beveled corner.

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

PARAMETER	SYMBOL	KBPC 10005	KBPC 1001	KBPC 1002	KBPC 1004	KBPC 1006	KBPC 1008	KBPC 1010	UNIT
Maximum Repetitive Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	v
Maximum RMS Voltage	V _{RRM}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward And Output Current @ $T_A=50^{\circ}C$	$I_{F(AV)}$	10.0							А
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load	IFSM	175.0							А
Maximum instantaneous forward voltage at 5.0 A	VF	1.0							V
Maximum Reverse Current @ TA=25°C	T	5.0							μΑ
at rated DC blocking voltage $@_{TA}=125^\circ\!\!\mathbb{C}$	Ir	0.5							mA
Operating junction temperature range	T _J	-55 to +125							°C
Storage Temperature Range	Tstg	-55 to +150							°C

Note: 1. Unit mounted on 8.7"×8.7"×0.24" thick (22×22×0.6 cm) Al. plate.

2. Unit mounted on P.C.B at 0.375" (9.5mm) lead length with 0.47"×0.47" (12×12mm) copper pads.

Suntan_®Su_®

KBPC10005 THRU KBPC1010


SINGLE-PHASE BRIDGE RECTIFIER

REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 10.0 Ampere

RATING AND CHARACTERISTIC CURVES KBPC10005 THRU KBPC1010

FIG.1 -- PEAK FORWARD SURGE CURRENT

FIG.2 - FORWARD DERATING CURVE

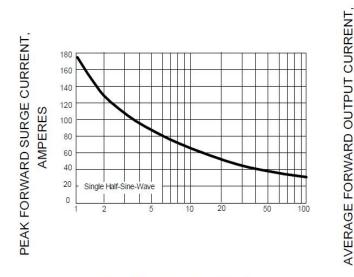


NUMBER OF CYCLES AT 60Hz


10 8 AMPERES 2 0 50 150

AMBIENT TEMPERATURE, °C

FIG.3 -- TYPICAL FORWARD CHARACTERISTIC

FIG.4 - TYPICAL REVERSE CHARACTERISTIC

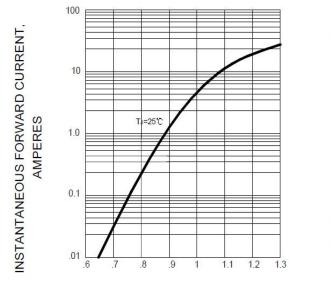



10

PERCENT OF RATED PEAK REVERSE VOLTAGE

80

100 120 140

INSTANTANEOUS FORWARD VOLTAGE, VOLTS

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.